



MAGELYS



PRO Version - 12,2 m / 12,8 m Coach - Cursor 9 Diesel EURO VI

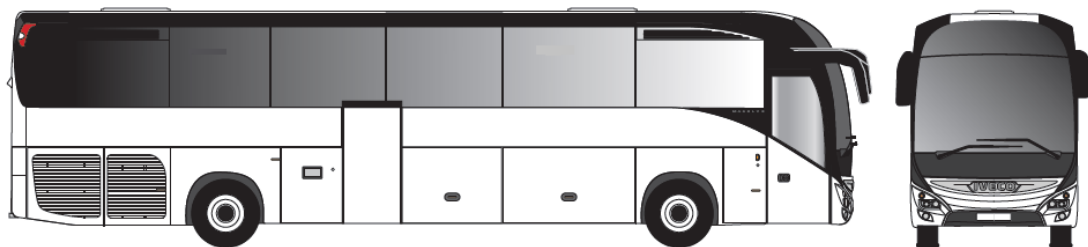

Layout maxi* 12.2 m 53 seats + I + I + WC
Seats 28 to 55



Layout maxi* 12.8 m 57 seats + I + I + WC
Seats 28 to 59 – with or w/o Wheelchair area

*Maximum passengers capacity (depends on permitted weights according to local legislation)

Length	12200 mm	12765 mm
Width	2550 mm	
Height (With/without A/C)	3620 mm	
Wheelbase	6321 mm	6886 mm
Front / Rear Overhang	2619 / 3260 mm	
Front / Rear Tread (steel rim)	2014 / 1817 mm	
Inner / Floor height	2100 / 1380 mm	
Wall-to-wall turning radius	10771 mm	11493 mm
Kerb-to-kerb turning radius	8982 mm	9704 mm
Approach / Departure angles	7°/7°	
GVW (max legally permitted weight depends on local legislation)	18000 / 19000 kg	
Max. Front axle load	7100 kg	
Max. Rear axle load technically admitted	12600 kg	
Volume of inner luggage racks	1.25 m ³	1.31 m ³
Volume luggage with WC and w/o driver berth	9.5 m ³	10.8 m ³

CURSOR 9 EURO VI

Power @ 1600 rpm	294 kW (400 Hp)
Torque	1700 Nm @1250 rpm
Displacement	8,7 liters
6 cylinders in line, vertical transverse at the rear, Common Rail	

IVECO
BUS

MAGELYS - PRO Version - 12,2 m / 12,8 m Coach - Cursor 9 Diesel EURO VI

BODY AND EXTERIOR EQUIPMENT

- Roof panel in sheet metals; front and rear face in polyester
- Side panels in sheet aluminum and polyester
- Front and middle door with one wing outwards opening
- Rear view mirrors with electric defrosting
- Anti-corrosion treatment by cathoretic immersion
- Luggage compartment doors on hinge

INTERIOR EQUIPEMENT

- Passenger seats type: SPACIO PRO
- Front and middle steps moulded of plastic with anti-slip coverings
- Removable carpet on the entrance steps & driver platform
- Separation moulded
- Curtains preparation
- Side panels trimming and Luggage rack lining
- Digital clock
- Refrigerator integrated in the dashboard (75cans of 33cl)

AUDIO/VIDEO

- Radio CD 24V controlled from the steering column

ELECTRICAL EQUIPMENT

- Accumulators batteries 230 A/h
- Alternators 140A + 140A
- Protection by fuses
- Halogen lighting
- Front fog lights
- LED D.R.L., side markers, rear lighting block
- LED lighting of driver area and door accesses
- Passenger compartment lighting with left & right LED continuous lighting

WINDOWS/ THERMAL COMFORT

- Tinted side windows (double glazing) as well as rear window
- 2 glazed venting openings in the roof
- Fully integrated HVAC with 4 evaporators units
- 30kW independent heating programmable

DRIVER COMPARTMENT

- Driver seat with adjustable inclination of the backrest
- Driver's side console (with mechanical gearbox)
- Board computer (controlled from the steering wheel)
- Driver front electric sun-visor & side manual sun-visors
- Reversing sensor
- Cruise control integrated with speed limiter
- Digital tachograph

Optional:

- Painting and adhesive customization
- Luggage compartment doors at pantograph

Optional:

- Coffee machine / Drinks dispenser
- Vacuum cleaner integrated
- Pleated / unpleated curtains
- Water or chemical toilet with flush system
- Digital clock / temperature display
- Hostess' camera / Road camera
- "Luxury" or basic removable carpet

Optional:

- Radio CD DVD / CD DVD + DVD player
- Charger for 6 CD / DVD
- Professional Line 3 radio
- 2/3 motorized LCD 19" 16/9 video screens
- Tuner for TV reception
- Microphone / Wireless microphone + Microphone

Optional:

- Front fog lights, with cornering light function
- Xenon lighting
- Emergency signal in connection with door opening
- 12 V or 24 V plug / Alcohol test
- Protection by circuit breakers
- Interface FMS (fleet management system)
- Plug for an external power source
- Central locking with or without remote control

Optional:

- Driver's window with electric defrost

Optional:

- GPS navigation
- Driver's seat armrest
- Hostess seat & compartment in the luggage rack
- Hostess calling button from passengers seats
- Reversing camera
- Driver's side console (with ZF 12 AS 2001)

ENGINE

- Hi-eSCR after treatment system
 - Diesel Oxydation Catalyst and Diesel Particulate Filter
 - Selective Catalytic Reduction of NOx with urea
 - Clean Up Catalyst
- Double cartridge fuel filter. Fuel pre-filter with water separator
- Large capacity air filter with blockage warning

GEARBOX

- Mechanic gearbox ZF 6S 1911
- Exterior warning buzzer with the shift of reverse speed

REAR AXLE

- Rear axle UI7X MERITOR (MICHELIN tyres)
- Standard axle ratio 4,11

*) with speed limiter at 100 km/h due to European legislation

FRONT AXLE/ STEERING

- Independent wheel front axle
- Worm-type steering ZF type 8098 with integrated power steering

SUSPENSION

- Fully pneumatic with set up control
- In the front: 2 bellows / 2 shock absorbers / 1 anti-roll bar
- In the rear: 4 bellows / 4 shock absorbers / 4 retaining drawbars / 1 anti-roll bar

COMPRESSED AIR

- Dual cylinder air compressor 630 cm3 "ENERGY SAVING"
- Air dryer & oil capture
- Manual bleeding valves on the air tanks, inflation taps

SAFETY

- Service brakes with pneumatic control, disk brakes in the front&rear
- Parking brake: 2 spring cylinders
- ESP, EBS, ABS. with ASR

RETARDER

- Intarder with mechanical gearbox

FUEL TANK AND UREA TANK

- 420 l diesel tank and 80 l urea tank

TYRES AND WHEELS

- Tyres 295/80 R22.5

Optional

- Oil change with oil aspiration device
- Centralized filling (water and oil)

Optional

- Gearbox robotized ZF 12 AS 2001 with Eco Switch

Engine	CURSOR 9 (400 Hp)	
	ZF 6S 1911	ZF 12AS 2001
Ratio (ZF)		
4.11	129 km/h*	n/a
3.70	143 km/h*	143 km/h*
3.36	157 km/h*	157 km/h*

Optional

- Front / rear equipment to increase/decrease the suspension height

Optional

- LDWS
- ACC

Optional

- 380 l / 420 l + 60 l Webasto / 480 l / 640 l diesel tank

Optional

- Aluminum rims

IVECO
BUS